

CorroLink[®]




FEATURES

- Pre-finished to a standard range of colours
- Lightweight
- Highly impact resistant
- Panel spans up to 5+ metres

CorroLink panel has a very robust design that incorporates pre-finished corrugated steel.

Due to the composite nature and inherent strength of the CorroLink panel design, very long spans can be achieved even in the most challenging of applications.

Although available in standard thicknesses of 40mm and 75mm we have manufactured CorroLink in thicknesses of up to 200mm and at lengths of 9000mm for custom insulation and spanning requirements.

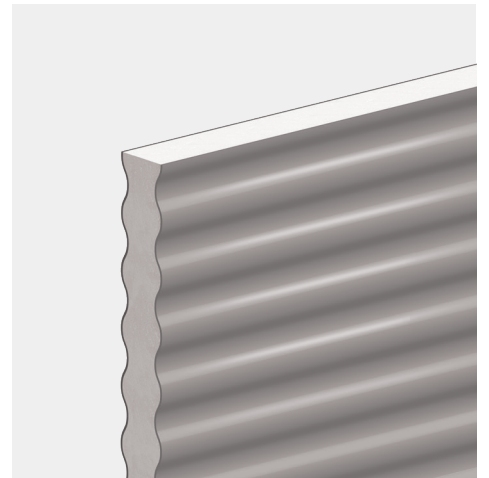

TECHNICAL SPECIFICATIONS

Outerskin	Pre-finished corrugated steel - 0.42 BMT
Panel core	EPS
Available lengths (mm)	up to 5000 +
Available heights (mm)	800 typical coverage
Thickness (mm)	40 and 75
Density (kg/m ²)	8.70
Rw	25

