

Retaining Panel

50 & 75




FEATURES

- Ideal for stepped blocks
- Fibre cement outer skin
- High density EPS core
- Internal reinforcing ribs
- Easily customised
- Can retain up to 500mm of soil (2.5kPa surcharge live loads) when used with SlimWall
- Can retain up to 750mm of soil (2.5kPa surcharge live loads) when used with VogueWall or EstateWall

The ModularWalls Retaining Panel utilises a high density core material combined with internal strengthening ribs to resist the forces of nature.

No need for an expensive stand-alone block retaining wall with a fence on top. Combine any modular wall with the ModularWalls Retaining Panel to maintain a seamless look along the breadth of your wall.

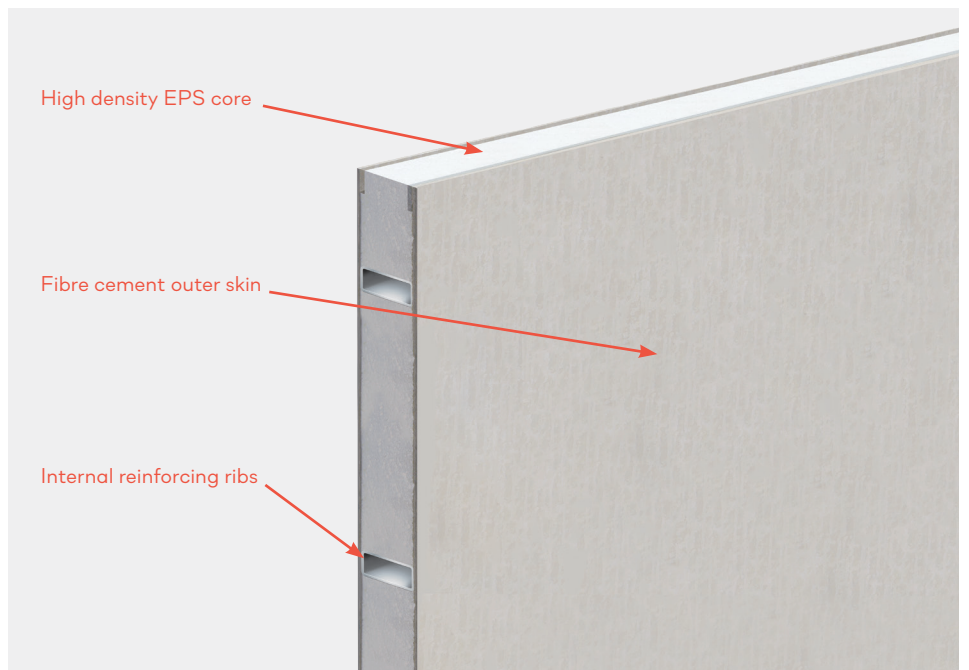

MODULARWALLS®

Retaining Panel

50 & 75

TECHNICAL SPECIFICATIONS

	SlimWall	VogueWall	EstateWall
Outer skin	Cementitious	Cementitious	Cementitious
Panel core	HD EPS + reinforcement ribs	HD EPS + reinforcement ribs	HD EPS + reinforcement ribs
Available lengths (mm)	2400	2400	2400
Available widths (mm)	600	600, 900, 1200	600, 900, 1200
Thickness (mm)	50mm	75mm	75mm
Density (kg/m ²)	15.75	15.90	15.90
Soil retention (mm) (non surcharged loads)	500 (2.5kPa surcharge live loads)	750 (2.5kPa surcharge live loads)	750 (2.5kPa surcharge live loads)

